
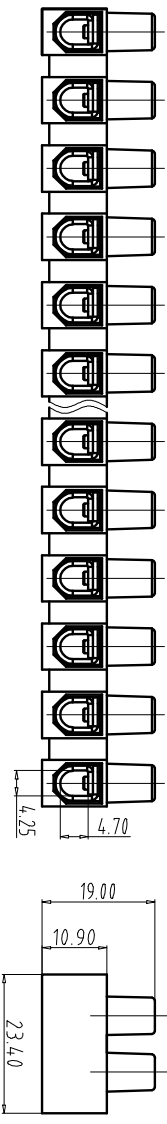


REV	ECN NO.	CONTENT	CHK	DATE

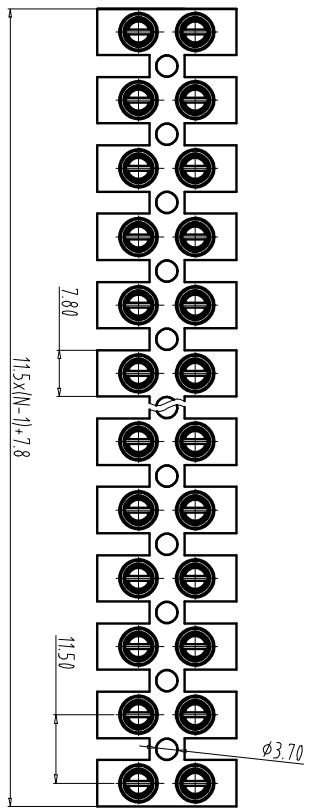

NOTES:

UL Standard

- Use group
- Wire range: 14-8AWG

Use group	B	C	D
Rated Current	50A	50A	10A
Rated Voltage	500V	150V	500V


IEC Standard

- Pollution Degree

Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	3kV
Rate Voltage(V)	750V
Rate Current(A)	57A

2. Wire range: 1.5-10mm<sup>2</sup>

- NOTES2:
- Housing: PA66(UL94V-2)
  - Current carrier: Steel(Zn Plated)
  - Screw: Steel(Zn Plated)
- NOTES3:
- Pitch: 11.5mm Poles: 02-24P
  - Stripping length: 9mm
  - Operating temperature: -40℃~+105℃
  - RoHS Compliance

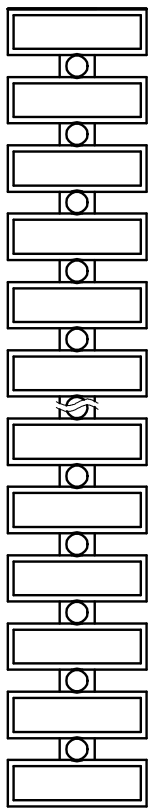

Total Pitch Tolerances		Nominal dimension range	
In mm		In mm	
over	to	over	to
0	30	53	70
30	53	70	90
53	70	90	115
		115	150
		150	200
		200	250
		250	320
		30	30
		30	53
		53	70
		70	90
		90	115
		115	150
		150	200
		200	250
		250	320
		0	0
		0	30
		30	53
		53	70
		70	90
		90	115
		115	150
		150	200
		200	250
		250	320
		0	0
		0	10
		10	10
		100	100
		100	150
		150	150

How to order

UL0-TB - PA2HS - XXP - Y Y 0.0A

Certificate Factory poles Customer requirements

Series NO. Code

color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	21.04.21	MM	SHEET/OF 1/1
CHK	DATE	SCALE	1:1	A4	
APP	DATE	NAME	UL0-TB-PA2HS-XXP-Y000A		

DWGNO: UL0TBV000A